KIT-TE/ KIT-TM

Roof kit for cased fans
Kit tejado para ventiladores tubulares



KIT-TE (+ HM/HC)



KIT TM (+ HM/HC) (+ HMF/HCF)

MANUFACTURING FEATURES

Set that allows to install short or long cased fans on the roof protecting them from inclement weather.

KIT TE
Set consisting of:
- Cowl made of reinforced glass fiber protection cowl.
- Support framework for roof adaptation in laminated steel sheet protected against corrosion by powder coating polyester resin.
- Anti-bird protection grid protected against corrosion.
- Kit not suitable for fire (fiber cowl -20+110ºC).

KIT TM
Set consisting of:
- Cowl made of galvanized sheet.
- Support framework for roof adaptation in laminated steel sheet protected against corrosion by powder coating polyester resin.
- Anti-bird protection grid protected against corrosion.
- Kit suitable for fire (metal cap).

APPLICATIONS

Designed for roof installation, they are indicated for:
- Renovation of air in all types of buildings and industries.
- Smoke extraction.
- Contribution of clean air.
- Maximum temperature subject to installed fan.
- Suitable for air speed lower than 13 m/s.

UNDER REQUEST

- Framework support in AISI 304,316.
- Cold galvanized steel.
- Hot galvanized steel.

CARACTERÍSTICAS CONSTRUCTIVAS

Conjunto que permite instalar ventiladores tubulares de camisa corta/ larga en tejado protegiéndolos de las inclemencias meteorológicas.

KIT TE
Conjunto compuesto por:
- Sombrerete de protección en fibra de vidrio reforzada.
- Marco soporte de adaptación a tejado en chapa de acero laminado protegido contra la corrosión mediante recubrimiento en polvo de resina de poliéster.
- Rejilla de protección antipájaros protegidos contra la corrosión.
- Kit no apto para fuego (sombrerete de fibra -20+110ºC).

KIT TM
Conjunto compuesto por:
- Sombrerete en chapa galvanizada.
- Marco soporte de adaptación a tejado en chapa de acero laminado protegido contra la corrosión mediante recubrimiento en polvo de resina de poliéster.
- Rejilla de protección antipájaros protegidos contra la corrosión.
- Kit apto para fuego (sombrerete metálico).

APLICACIONES

Diseñados para montaje en cubierta o tejado, son indicados para:
- Renovación de aire en todo tipo de edificios e industrias.
- Extracción de humos.
- Aportación de aire limpio.
- Temperatura máxima sujeto a ventilador instalado.
- Adecuado para velocidades de aire de hasta 13 m/s.

BAJO DEMANDA

- Marco soporte en AISI 304,316.
- Acero galvanizado en frio.
- Acero galvanizado en caliente.

KIT-TE

Code	Model	Weight Kg
KTE35	KIT TE 35	12
KTE40	KIT TE 40	14
KTE45	KIT TE 45	17
KTE56	KIT TE 56	30
KTE63	KIT TE 63	31
KTE71	KIT TE 71	42
KTE80	KIT TE 80	42
KTE90	KIT TE 90	52

KIT-TM

Code	Model	Weight Kg
KTM35	KIT TM 35	13
KTM40	KIT TM 40	16
KTM45	KIT TM 45	19
KTM56	KIT TM 56	33
KTM63	KIT TM 63	33
KTM71	KIT TM 71	45
KTM80	KIT TM 80	45
KTM90	KIT TM 90	56

DIMENSIONS / dimensiones (mm)

KIT-TE

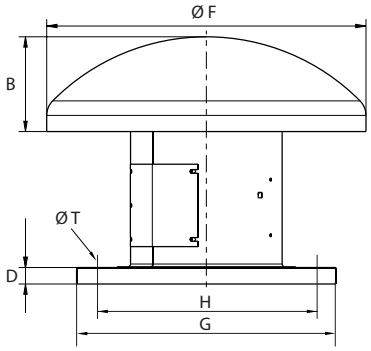

Model	B	D	F	G	H	T
KIT TE 35	230	40	775	630	535	12
KIT TE 40	230	40	775	630	535	12
KIT TE 45	255	40	960	710	590	14
KIT TE 56	290	50	1080	905	750	14
KIT TE 63	350	50	1290	905	750	14
KIT TE 71	350	50	1290	1100	840	14
KIT TE 80	518.5	50	1580	1100	840	14
KIT TE 90	518.5	50	1580	1250	950	14

KIT-TM

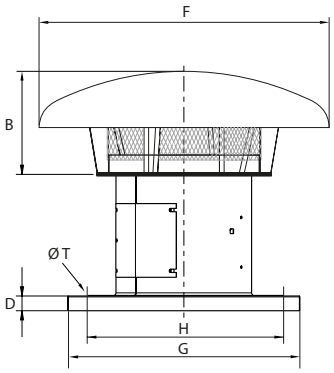

Model	B	D	F	G	H	T
KIT TM 35	300	40	619	630	535	12
KIT TM 40	325	40	790	630	535	12
KIT TM 45	325	40	790	710	590	14
KIT TM 56	388	50	1100	905	750	14
KIT TM 63	388	50	1100	905	750	14
KIT TM 71	388	50	1100	1100	840	14
KIT TM 80	390	50	1250	1100	840	14
KIT TM 90	427	50	1500	1250	950	14